FFK- 005

DYNAMIC MICROPHONE

VOCAL SERIES MICRO

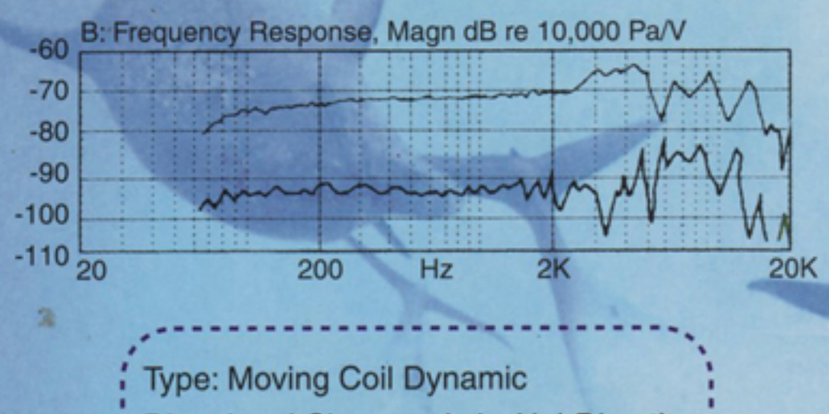

Type: Moving Coil Dynamic
Directional Characteristic: Uni-Direction
Frequency Response: 60～15,000Hz
Impedance:600Ω ±30%
Sensitivity:-75±3dB
型　　式:動圈示微音器
指向特性:單一指向性
頻率響應:60～15,000Hz
阻　　抗:600Ω ±30%
靈 敏 度:-75±3dB

SO~7300

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 52 X 169 mm
- 重　　量:約220g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 52 X 169 mm
- Weight: About 220g (Without cable)

SO~76

- 本　　體:鋅
- 外觀尺寸:Ø 5
- 重　　量:約2
- Body: Zinc al
- Dimension: Ø
- Weight: Abou

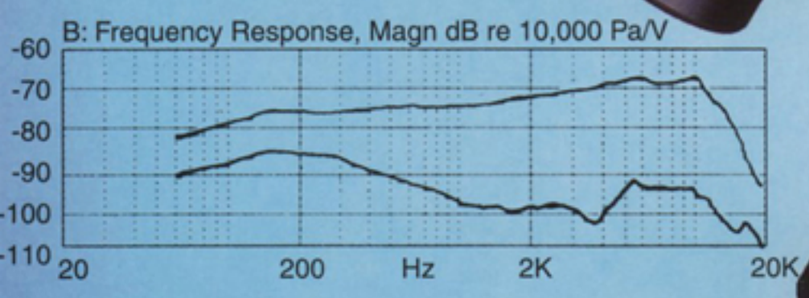

KEY-CONTROL-SERIES MICROPHONE

Type: Moving Coil Dynamic
Directional Characteristic: Uni-Direction
Frequency Response: 80～12,000Hz
Impedance:600Ω ±30%
Sensitivity:-75±3dB
型　　式:動圈示微音器
指向特性:單一指向性
頻率響應:80～12,000Hz
阻　　抗:600Ω ±30%
靈 敏 度:-75±3dB

KCM~828

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 56 X 198 mm
- 重　　量:約310g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 56 X 198 mm
- Weight: About 310g (Without cable)

SO~666

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 53 X 164 mm
- 重　　量:約270g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 53 X 164 mm
- Weight: About 270g (Without cable)

SO~888

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 53 X 169 mm
- 重　　量:約270g(不含導
- Body: Zinc alloy body
- Dimension: Ø 53 X 169 m
- Weight: About 270g (Witho
- With dual tone

PHONE



DO

合金本體

2 X 169 mm

20g(不含導線重量)

y body

52 X 169 mm

220g (Without cable)

SO~7700

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 52 X 165 mm
- 重　　量:約270g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 52 X 165 mm
- Weight: About 270g (Without cable)

SO~7800

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 52 X 169 mm
- 重　　量:約270g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 52 X 169 mm
- Weight: About 270g (Without cable)

重量)

t cable)

SO~999

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 52 X 163 mm
- 重　　量:約245g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 52 X 163 mm
- Weight: About 245g (Without cable)

SO~335

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 52 X 163 mm
- 重　　量:約245g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 52 X 163 mm
- Weight: About 245g (Without cable)

SO~777

- 本　　體:鋅合金本體
- 外觀尺寸:Ø 52 X 164 mm
- 重　　量:約220g(不含導線重量)
- Body: Zinc alloy body
- Dimension: Ø 52 X 164 mm
- Weight: About 220g (Without cable)

MIC. SERIES
MINI TYPE

SR~311

- MATCH MIC. MODEL NO: EM-508/ EM-903/ ET-803
- SINGLE CH. RECEIVER SYSTEM
- QUARTZ CONTROLLED
- HANDHELD MIC.
- PLASTIC FRONT PANEL & CASE
- POWER AC 115V/ 230V & DC 12V-18V
- RF (AF) LED DISPLAY AUDIO- OUTPUT (6.3Ø)
- BUILT IN ANTENNA
- VOLUME CONTROLLED
- TONE SQUELCH CONTROL

SR~312

- MATCH MIC. MODEL NO: EM-508/ EM-903/ ET-803
- DUAL CH. RECEIVER SYSTEM
- HANDHELD MIC.
- PLASTIC FRONT PANEL & CASE
- POWER AC 115V/ 230V & DC 12V- 18V
- RF (AF) LED DISPLAY AUDIO- OUTPUT (6.3Ø)
- BUILT IN ANTENNA
- VOLUME CONTROLLED
- TONE SQUELCH CONTROL

SR~318A

- MATCH MIC. MODEL NO: EM-508/ET-803
- SINGLE CH. RECEIVER SYSTEM
- WITH ONE HANDHELD OR LAVALIER
- BODYPACK WIRELESS MIC.
- ALUMINIUM FRONT PANEL AINC- VARNISH CASE
- RF (AF) LED DISPLAY. AF- OUT (6.3Ø)
- M-TYPE ANTENNA SOCKET
- VOLUME CONTROLLED
- POWER DC 12V- 18V
- QUARTZ CONTROLLED

SR~868

- MATCH MIC. MODEL NO: EM-508/ EM-903/ ET-803
- DUAL CH. RECEIVER SYSTEM
- HANDHELD MIC.
- PLASTIC FRONT PANEL & CASE
- POWER AC 115V/ 230V & DC 12V-18V
- RF AF-LED DISPLAY AUDIO-OUTPUT (6.3Ø)
- BUILT IN ANTENNA
- VOLUME CONTROLLED
- S.M.D. & P.C.B.
- TONE SQUELCH CONTROL

LASER VIEW

LV-700

The sca

- Laser Source: Red Diode
- Wavelength: 635~670 mm
- Max. Output Power: < 5mW, Class III a
  or AAA Battery X 4
- Dimensions(W X L X H): 115 X 111 X 42 mm
- Weight: 150 gm(Without battery)
- Color: Red, Yellow, Green, Blue, Black

AUDIO/VIDEO CABLE

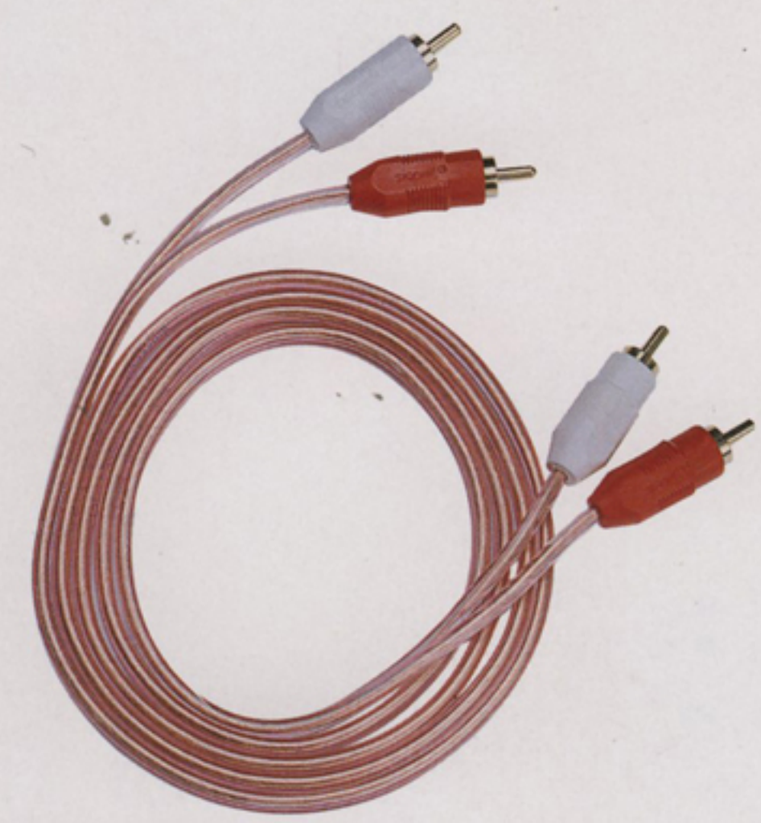

KC-320

- 3.7mm X 7.4 X 5'
- RCA PLUG

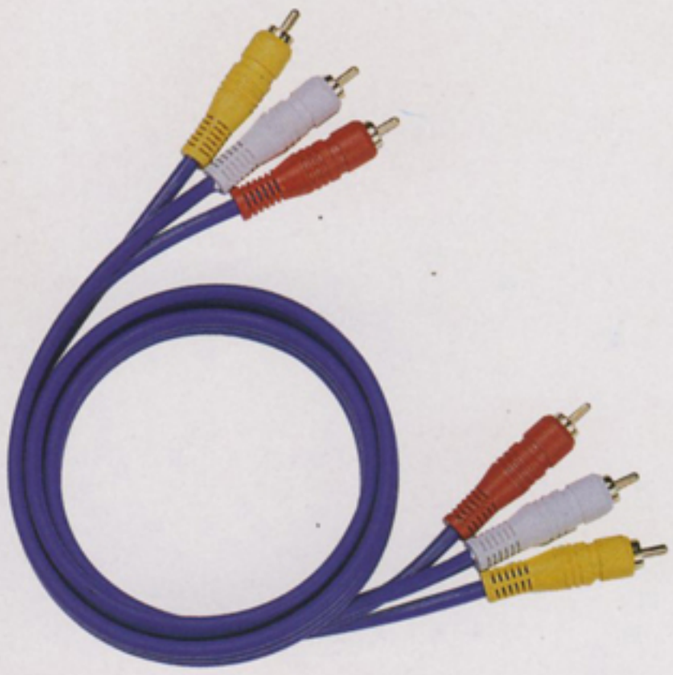

KC-520

- 6mm X 18 X 3'
- RCA PLUG

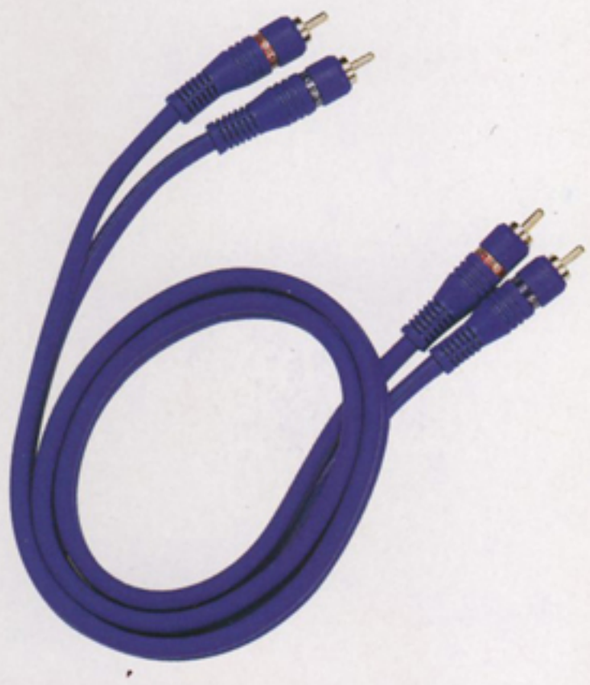

KC-530

- 6mm X 12 X 5'
- RCA PLUG

MICROPHONE CABLE

KC-620

- 3PIN XLR FEMALE CONNECTOR
- 3PIN XLR MALE CONNECTOR
- 6m X 20'

KC-630

- 3PIN XLR FEMALE CONNECTOR
- 6.30 PLUG
- 6m X 20'

KC-633

- 6.5m X 20'

CPK POWER BEAT MITELLO® Percussion

CORA & PETER KUO, INC.

MAILING ADDRESS: P.O. BOX 610 TAICHUNG, TAIWAN, R.O.C.
TEL: (04)372-0100, 372-0540, 372-0365
FAX: 886-4-3720463 / 3752221
CABLE ADDRESS: "CPKINC" TAICHUNGTAI
E-MAIL: cpkinc@ms12.hinet.net http://www.cpkinc.com